



# Artmark LED

LEDing the Way

## Applications:

Ideal for High Ceiling Mount. Specifically for warehouse lighting, gymnasiums, cold storage facilities and Industrial manufacturing plants.


## Features and Benefits

- Replace 250 Watt MH to 400W HPS fixtures
- ETL Certified, NEMA Type 2, IP62, DLC approved.
- Solid block aluminum housing with advanced
- Fin design for cooler operating temperatures
- 50 % Lumen Output Remaining at 25' Feet from center of light.



## HIGH BAYS

Ref. No.	Description	Dimensions	Weight
ARTHB10MV56GRY	100W High Bay Fixture 120~277V 5600K	20"x19"x8"	18 Lbs.
ARTHB15MV56GRY	150W High Bay Fixture 120~277V 5600K	20"x19"x8"	18 Lbs.
ARTHB20MV56GRY	200W High Bay Fixture 120~277V 5600K	20"x19"x8"	18 Lbs.

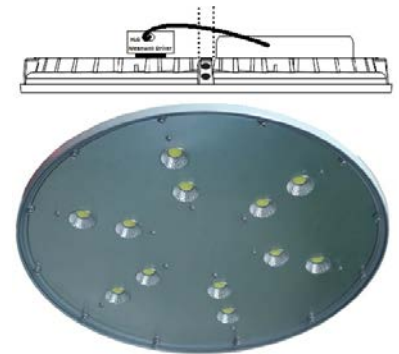

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988


<http://www.artmark.com>



# Artmark LED

LEDing the Way

## 150 Watts Multi-Volt

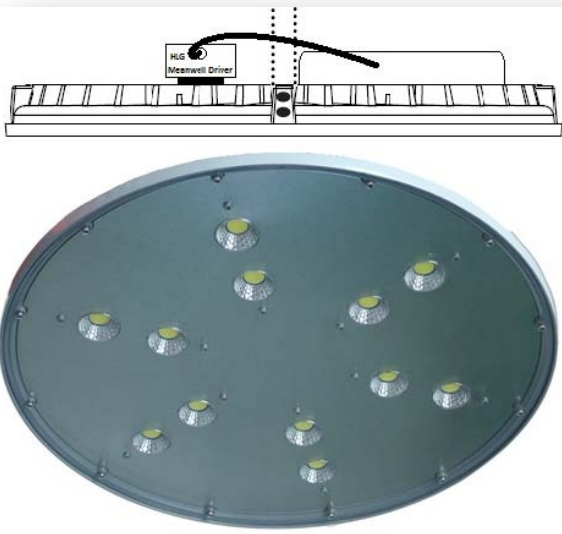

## Specifications

<b>Lumens</b>	9600~13600 Lm
<b>Watts</b>	150W
<b>Flux</b>	12-12.5v
<b>Lumen Per Watt</b>	> 91Lm/W
<b>CRI</b>	>72
<b>Lifespan</b>	50,000 Hrs.
<b>Voltage</b>	110~277Vac
<b>Meanwell Driver</b>	Certified UL 8750 4 kv Surge Protection (IEC 61000-4-5)
<b>K Temp.</b>	5600K
<b>Operating Temp</b>	-40°C ~ +70°C
<b>NEMA</b>	IP 62 (Fixture) IP 65 (Driver )
<b># of LEDs</b>	12 LED



# Artmark LED

LEDing the Way

## 200 Watts Multi-Volt



## Specifications

<b>Lumens</b>	16600~18200 Lm
<b>Watts</b>	200W
<b>Flux</b>	10-20v
<b>Lumen Per Watt</b>	> 91Lm/V
<b>CRI</b>	>72
<b>Lifespan</b>	50,000 Hrs.
<b>Voltage</b>	110~277Vac
<b>Meanwell Driver</b>	Certified UL 8750 4 kv Surge Protection (IEC 61000-4-5)
<b>K Temp.</b>	5600K
<b>Operating Temp</b>	-40°C ~ +70°C
<b>NEMA Rating</b>	IP 62 (Fixture) IP 65 (Driver )
<b># of LEDs</b>	12 LED