



APC Fittings

Metallic Liquid Tight Flexible Conduit

Applications:

For industrial and commercial use in the wiring circuit protection in extremely wet or damp areas. It is also suitable for the protection of electrical cables machinery, tools and equipment that do not require listed product. For internal and external use.

Available in Sizes:


3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4" on coils and wooden reels.

Construction:

Galvanized metal flexible pipe internal corrosion and sunlight resistant, with a system interlock / squarelock and a nylon cord in the middle of filling. PVC jacket is flexible, impact and flame resistant.

Working Temperature: -40 ° to 90 ° Celsius.

Standard Color: Grey

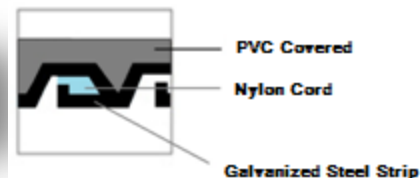

ARTMARK Cat. No.	Size	Standard Package (Ft)	Weight / Package Std. (Lbs)	Internal Diameter (mm)		External Diameter (mm)		Curving Radius (mm)
				Min.	Max.	Min.	Max.	
ARTMLTC038	3/8"	100	18	12.3	12.6	15.0	15.6	50
ARTMLTC050	1/2"	100	22	15.8	16.1	18.8	19.1	65
ARTMLTC075	3/4"	100	30	20.8	21.1	23.9	24.2	75
ARTMLTC100	1"	100	37	26.4	26.8	29.7	30.1	100
ARTMLTC125	1-1/4"	50	27	34.6	35.0	38.8	39.5	120
ARTMLTC150	1-1/2"	50	40	39.6	40.3	43.8	44.5	140
ARTMLTC200	2"	50	50	50.6	51.3	56.2	56.9	180
ARTMLTC250	2-1/2"	25	36	62.7	63.7	68.7	69.7	240
ARTMLTC300	3"	25	49	77.0	78.0	83.0	84.0	300
ARTMLTC400	4"	25	67	100.8	101.8	107.2	108.7	350

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

L
i
q
u
i
d

T
i
g
h
t

C
o
n
d
u
i
t