



APC Fittings

# Metallic Threaded Bushings

## Applications:


Zinc Die Cast bushings are installed at the end of rigid/IMC conduits or in connectors to prevent the damage on cable during installation.


### Available in Sizes:

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4".

### Construction:

Zinc die cast

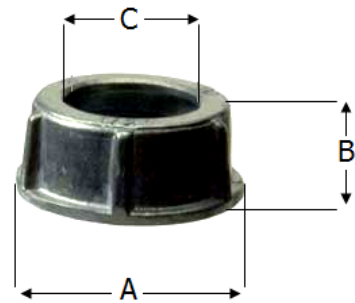

ARTMARK Cat. No.	Size	Standard Ctn. 	Weight per Ctn. (Lbs)	Outer Diameter A		Height B		Inner Diameter C	
				mm	in (")	mm	in (")	mm	in (")
ARTGB050	1/2"	1400	3	26.8	1.06	10.3	0.406	15.9	0.626
ARTGB075	3/4"	1000	2.64	32.2	1.28	10.4	0.409	20.6	0.811
ARTGB100	1"	500	2.15	39	1.54	12.6	0.496	26.55	1.045
ARTGB125	1-1/4"	300	2.07	47.9	1.89	13.6	0.535	35.9	1.413
ARTGB150	1-1/2"	200	2.14	54	2.13	15.5	0.61	40.8	1.606
ARTGB 200	2"	150	1.75	66.8	2.63	13	0.51	50.5	1.988
ARTGB250	2-1/2"	75	13.9	52.1	2.05	15.8	0.62	62.1	2.445
ARTGB300	3"	65	19.5	97	3.82	20.9	0.823	77.9	3.067
ARTGB400	4"	40	21.5	125.5	4.94	21.8	0.858	102.5	4.035

M  
e  
t  
a  
l  
l  
i  
c  
  
T  
h  
r  
e  
a  
d  
e  
d  
  
B  
u  
s  
h  
i  
n  
g  
s